

# SOLIDEAL RES 550 MAGNUM SERIE

BY CAMSO



RESILIENT



## MAXIMUM LIFESPAN FOR MEDIUM INTENSITY APPLICATIONS

The standard in reliability and the longest lasting tire in the industry for medium intensity applications\*. Its wide profile and flat footprint designed to maximize life. Its large tread blocks and deep lugs increase traction, while delivering maximum stability.

### PERFORMANCE

#### ENERGY SAVINGS



#### TIRE LIFE



#### COMFORT




# RESILIENT TIRES

# SOLIDEAL RES 550 MAGNUM SERIE

BY CAMSO

TIRE SIZE	RIM SIZE <sup>(1)</sup>	HEEL	
		NORMAL	QUICK
3.00 - 4	2.10-4	»	
3.00 - 4	2.50C-4	»	
4.00 - 4	2.10-4	»	
4.00 - 4	2.50C-4	»	
4.00 - 8	3.00D-8	»	»
5.00 - 8	3.00D-8	»	»
5.00 - 8	3.50-8	»	
15 x 4 1/2 - 8 (125/75-8)	3.00D-8	»	»
15 x 4 1/2 - 8 (125/75-8)	3.25I-8	»	
16 x 6 - 8 (150/75-8)	4.33R-8	»	»
18 x 7 - 8 (180/70-8)	4.33R-8	»	»
18 x 9 - 8	7.00E-8	»	
140 / 55 - 9	4.00E-9		»
6.00 - 9	4.00E-9	»	»
21 x 8 - 9 (200/75-9)	6.00E-9	»	»
200 / 50 - 10	6.50F-10	»	»
6.50 - 10	5.00F-10	»	»
6.50 - 10	5.50F-10	»	
23 x 9 - 10 (225/75-10)	6.50F-10	»	»
7.50 - 10	5.00F-10	»	
7.50 - 10	5.50F-10	»	»
23 x 10 - 12 (250/60-12)	8.00G-12	»	»
27 x 10 - 12 (250/75-12)	8.00G-12	»	»
7.00 - 12	5.00S-12	»	»
8.25 - 12	5.00S-12	»	
150 / 100 - 13 (23x5)	3.75P-13	»	»
28 x 9 - 15 (8.15-15 & 225/75-15)	6.50-15	»	
28 x 9 - 15 (8.15-15 & 225/75-15)	7.00-15	»	»

TIRE SIZE	RIM SIZE <sup>(1)</sup>	HEEL	
		NORMAL	QUICK
355 / 50 - 15	9.75-15	»	»
355 / 65 - 15 (32x12.1-15)	9.75-15	»	»
250 - 15 (250/70-15)	7.00-15	»	»
250 - 15 (250/70-15)	7.50-15	»	»
300 - 15 (315/70-15)	8.00-15	»	»
310 - 15 EW	8.00V-15	»	
5.50 - 15	4.50E-15SDC	»	
6.00 - 15	4.50E-15SDC	»	
7.00 - 15	5.50-15	»	»
7.00 - 15	6.00-15	»	
7.50 - 15	5.50-15	»	»
7.50 - 15	6.00-15	»	
7.50 - 15	6.50-15	»	»
8.25 - 15	5.50-15	»	»
8.25 - 15	6.50-15	»	»
7.50 - 16	6.00-16	»	
9.00 - 20	7.00-20	»	
10.00 - 20	6.50-20	»	
10.00 - 20	7.00-20	»	
10.00 - 20	7.50-20	»	
10.00 - 20	8.00-20	»	
11.00 - 20	7.50-20	»	
11.00 - 20	8.00-20	»	
12.00 - 20	8.00-20	»	
12.00 - 20	8.50-20	»	
14.00 - 24	10.00-24IRA	»	
14.00 - 25	11.25-25	»	
16.00 - 25	11.25-25	»	

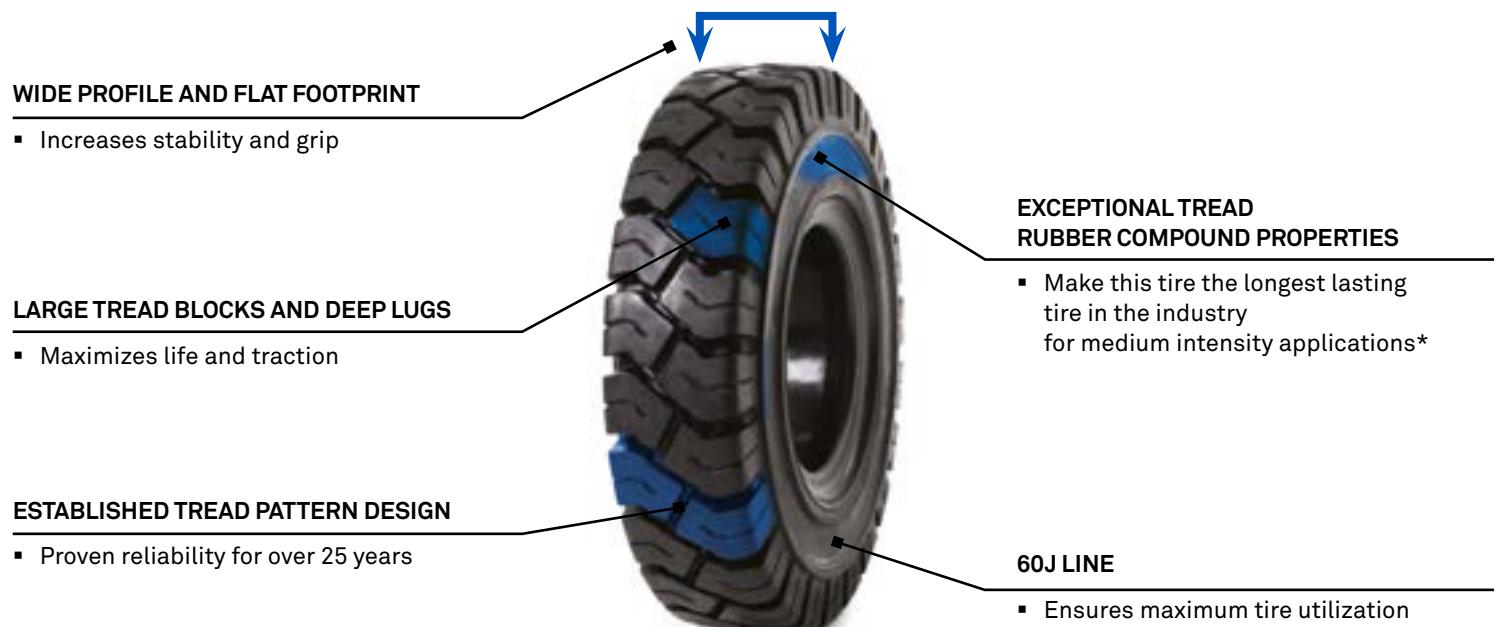

\*Based on internal tests

**AVAILABLE IN NON-MARKING**



#### Remarks

(1) Tolerances on wheel diameter • Code designated sizes (in): nominal rim diameter +0.005"/-0" • Metric sizes (mm): h11 according to ISO/R286.  
Surface roughness Ra < 6.3 µm • Chamfer 5 mm wide @ 30°

It is possible that certain items are not sold in your region.

Please contact your local sales contact to check tire availability in your region.

